

LaView 8 Channel H.265 Network Video Recorder






Key Features

- Third-Party network cameras supported
- Up to 8MP resolution recording
- HDMI output up to 4K, VGA output at up to 1080P resolution
- Plug & Play with 8 independent PoE network interfaces
- 1 SATA HDD interface up to 8TB each

Rear Panel

- 1. Network Interfaces with PoE function
- 2. WAN Port
- 3. Audio Output
- 4. LINE IN
- 5. VGA Port
- 6. HDMI Interface
- 7. USB 3.0
- 8. Alarm
- 9. USB 2.0
- 10. Power Port
- 11. Power Switch

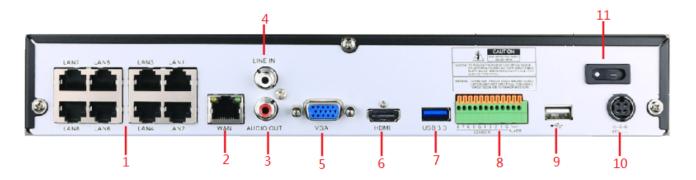



LaView 8 Channel H.265 Network Video Recorder

NVR	LV-N7208C8E
Video/Audio Input	
IP video input	8-ch
Incoming bandwidth	100Mbps
Outgoing bandwidth	100Mbps
Video/Audio output	
Recording resolution	8MP/5MP/4MP/3MP/1080P/960P/720P
HDMI/VGA output	1-ch, resolution: HDMI, 3840 × 2160, 2560 × 1440, 1900 × 1200, 1600 × 1200, 1680 × 1050, 1920 × 1080, 1280 × 1024, 1280 × 720, 1024 × 768 VGA, 1920 × 1080 ,1280 × 1024, 1280 × 720, 1024 × 768
Frame Rate	Main Stream: 60 fps(N)/50 fps(P)
	Sub-stream: 60 fps(N)/50 fps(P)
Audio output	1-ch, RCA (Linear, 1 kΩ)
Decoding	
Playback resolution	8MP/5MP/4MP/3MP/1080P/960P / 720P
Capability	8-ch
Hard disk	
SATA	1 SATA interface for 1 HDDs
Capacity	Up to 8TB capacity for each HDD
External interface	
Network interface	1 RJ-45 10M / 100M/1000M self-adaptive Ethernet interface
USB port	2 × USB2.0,1×USB3.0
POE Interface	
Interface	8 independent 100 Mbps PoE
Power	≤ 30W
Supported standard	AT
General	
Power Supply	DC 48V,
Consumption	≤ 10 W
Working temperature	14° F~131° F(-10° C~+55° C)
Working humidity	10%~90%
Chassis	19-inch rack-mounted 1U chassis
Dimensions (WxDxH)	15.0" x 13.4" x 2.0" (380 x 340 x 50mm)
Weight	≤4.4lb(2kg)