


## LaView 8 Channel H.265 IP Network Video Recorder

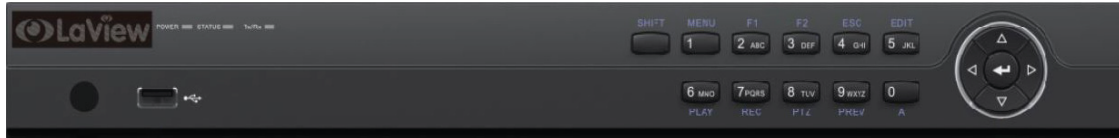


### Key Features

- Third-Party network cameras supported
- Up to 8MP resolution recording
- HDMI output at up to 3840x2160P resolution  
VGA output at up to 1920x1080P resolution
- Plug & Play with 8 independent PoE network interfaces
- 1 SATA HDD interface up to 6TB

### Rear Panel

- |                          |  |
|--------------------------|--|
| 1. Audio In              | 6. USB Port                              |
| 2. Audio Out             | 7. Ground                                |
| 3. VGA                   | 8. 100 to 240 VAC Power Input            |
| 4. HDMI Interface        | 9. Power Switch                          |
| 5. LAN Network Interface | 10. Network Interfaces with PoE function |

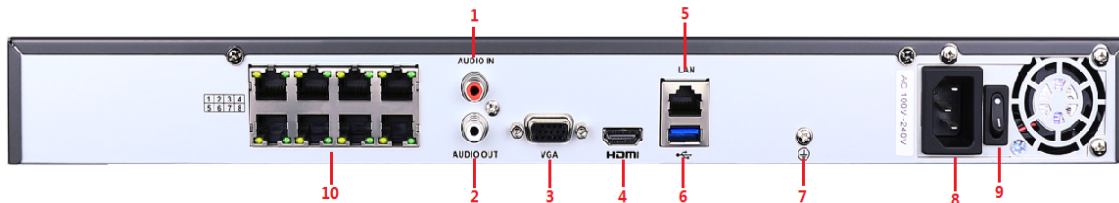

## LaView 8 Channel H.265+IP Network Video Recorder

NVR	LV-N9508Q8E
<b>Video/Audio Input</b>	
IP video input	8-ch
Two-way audio input	1-ch, RCA(2.0Vp-p,1kΩ)
Incoming bandwidth	80Mbps
Outgoing bandwidth	80Mbps
<b>Video/Audio output</b>	
Recording resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF / DCIF / 2 CIF / CIF / QCIF
HDMI output	1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1-ch, resolution: 1920x1080/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio output	1-ch, RCA (Linear, 1 kΩ)
Decoding format	H.265/H.264/H.264 Zip+/MPEG4
Playback resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF / DCIF / 2 CIF / CIF / QCIF
Synchronous playback	8-ch
<b>Network</b>	
Network protocols	TCP/IP, PT CLOUD, DHCP, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard disk</b>	
SATA	1 SATA
Capacity	Up to 6TB capacity for each HDD
<b>External interface</b>	
Network interface	1:10M / 100M/1000M self-adaptive Ethernet interface
USB port	2 × USB2.0
<b>POE Interface</b>	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 80W
Supported standard	IEEE 802.3 af/at
<b>General</b>	
Power Supply	100 to 240V AC
Consumption	≤ 15 W
Working temperature	14° F~131° F (-10° C ~+55° C)
Working humidity	10%~90%
Chassis	1U chassis
Dimensions (WxDxH)	12.5" x 9.5" x 2.0"
Weight	≤ 6.6lb(3 kg )