

# LaView 16 Channel H.265 IP Network Video Recorder




## Key Features

- Third-Party network cameras supported
- Up to 8MP resolution recording
- HDMI output at up to 3840x2160P resolution  
VGA output at up to 1920x1080P resolution
- Plug & Play with 16 independent PoE network interfaces
- 2 SATA HDD interface up to 12TB

## Rear Panel

1. 100 to 240 VAC Power Input
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA
7. USB Port
8. Ground
9. Power Switch
10. Network Interfaces with PoE function

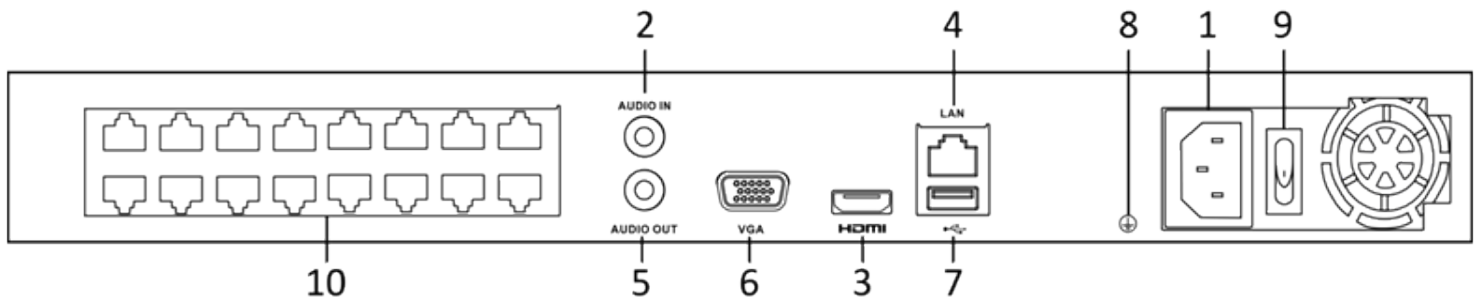

## LaView 16 Channel H.265 IP Network Video Recorder

NVR	LV-N9516D6E
<b>Video/Audio Input</b>	
IP video input	16-ch
Two-way audio input	1-ch, RCA(2.0Vp-p,1kΩ)
Incoming bandwidth	160Mbps
Outgoing bandwidth	80Mbps
<b>Video/Audio output</b>	
Recording resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF / DCIF/2 CIF / CIF/ QCIF
HDMI output	1-ch, resolution: 3840x2160/30Hz, 1920x1080P/60Hz, 1600×1200/60Hz, 1280×1024/60Hz,1280×720/60Hz, 1024×768/60Hz
VGA output	1-ch, resolution: 1920x1080/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio output	1-ch, RCA (Linear, 1 kΩ)
Playback resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF / DCIF/2 CIF / CIF/ QCIF
Synchronous playback	16-ch
<b>Network</b>	
Network protocols	TCP/IP, PT CLOUD, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard disk</b>	
SATA	2 SATA
Capacity	Up to 6TB capacity for each HDD
<b>External interface</b>	
Network interface	1:10M / 100M/1000M self-adaptive Ethernet interface
USB port	2× USB2.0
Alarm in/out	
<b>POE Interface</b>	
Interface	16 RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 150W
Supported standard	IEEE 802.3 af/at
<b>General</b>	
Power Supply	100 to 240V AC, ≤ 280W
Consumption	≤ 15 W
Working temperature	14° F~131° F(-10° C ~+55° C)
Working humidity	10%~90%
Chassis	1U chassis
Dimensions (WxDxH)	15.2"× 12.4" × 2.0" (385 × 315 × 52 mm )
Weight	< 5.7lb (2.6 Kg) (without hard disk)