


# LaView 16 Channel H.265 IP Network Video Recorder

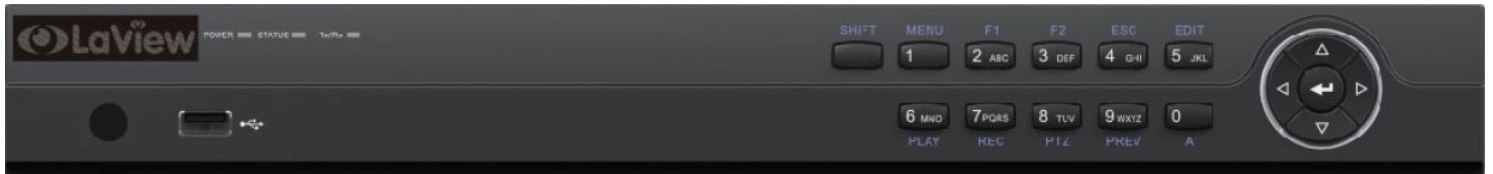


## Key Features

- Third-Party network cameras supported
- Up to 8MP resolution recording
- HDMI output at up to 3840x2160P resolution  
VGA output at up to 1920x1080P resolution
- Plug & Play with 16 independent PoE network interfaces
- 2 SATA HDD interface up to 12TB

## Rear Panel

- |                          |  |
|--------------------------|--|
| 1. Audio In              | 9. 100 to 240 VAC Power Input            |
| 2. Audio Out             | 10. Power Switch                         |
| 3. VGA                   | 11. Network Interfaces with PoE function |
| 4. HDMI Interface        |  |
| 5. ALARM IN/OUT          |  |
| 6. LAN Network Interface |  |
| 7. USB Port              |  |
| 8. Ground                |  |

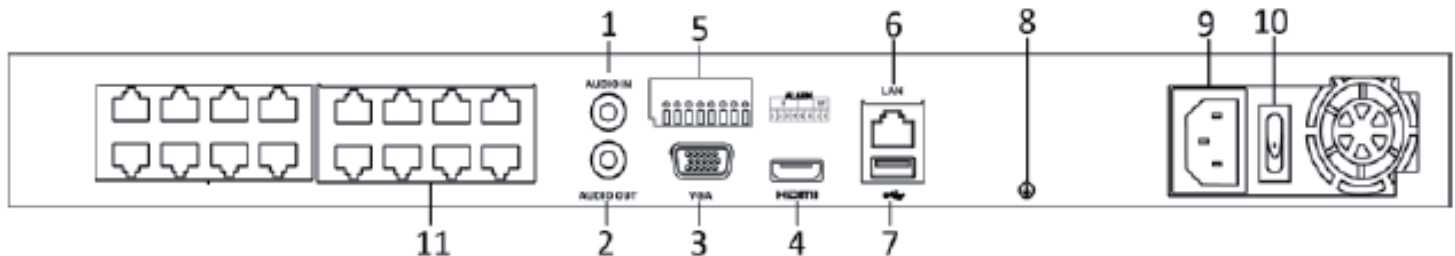

## LaView 16Channel H.265 IP Network Video Recorder

NVR	LV-N9616D6E
<b>Video/Audio Input</b>	
IP video input	16-ch
Two-way audio input	1-ch, RCA(2.0Vp-p,1kΩ)
Incoming bandwidth	160Mbps
Outgoing bandwidth	160Mbps
<b>Video/Audio output</b>	
Recording resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF /DCIF/2 CIF / CIF/ QCIF
HDMI output	1-ch, resolution: 3840x2160/30Hz, 2560x1440P/60Hz, 1920x1080P/60Hz, 1600×1200/60Hz, 1280×1024/60Hz,1280×720/60Hz, 1024×768/60Hz
VGA output	1-ch, resolution: 1920x1080/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio output	1-ch, RCA (Linear, 1 kΩ)
Playback resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF /DCIF/2 CIF / CIF/ QCIF
Synchronous playback	16-ch
<b>Network</b>	
Network protocols	TCP/IP, PT CLOUD, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard disk</b>	
SATA	2 SATA
Capacity	Up to 6TB capacity for each HDD
<b>External interface</b>	
Network interface	1:10M / 100M/1000M self-adaptive Ethernet interface
USB port	1 × USB2.0,1×USB3.0
Alarm in/out	4/1
<b>POE Interface</b>	
Interface	16 RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200W
Supported standard	IEEE 802.3 af/at
<b>General</b>	
Power Supply	100 to 240V AC
Consumption	≤ 15 W
Working temperature	14° F~131° F(-10° C ~+55° C)
Working humidity	10%~90%
Chassis	1U chassis
Dimensions (WxDxH)	14.9" x 11.4" x 1.9" (380 x 290 x 48mm)
Weight	< 6.6lb (3Kg) (without hard disk)