

LaView 4 Channel H.264 IP Network Video Recorder




Key Features

- Third-Party network cameras supported
- Up to 6MP resolution recording
- HDMI and VGA output at up to 1920 x 1080P resolution
- Plug & Play with 4 independent PoE network interfaces
- 1 SATA HDD interface up to 6TB

Rear Panel

- | | |
|--------------------------|--|
| 1. Audio In | 9. Ground |
| 2. Audio Out | 10. Network Interfaces with PoE function |
| 3. VGA | |
| 4. HDMI Interface | |
| 5. LAN Network Interface | |
| 6. USB Port | |
| 7. 48 VDC Power Input | |
| 8. Power Switch | |

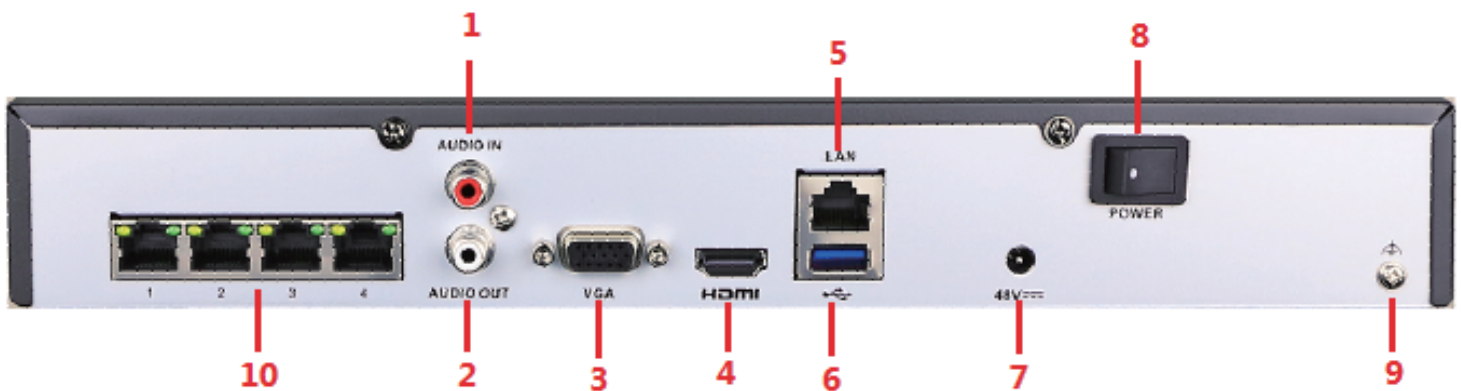

LaView 4 Channel H.264 IP Network Video Recorder

NVR	LV-N9804B4E
Video/Audio Input	
IP video input	4-ch
Two-way audio input	1-ch, RCA(2.0Vp-p,1kΩ)
Incoming bandwidth	40Mbps
Outgoing bandwidth	80Mbps
Remote connections	128
Video/Audio output	
Recording resolution	6 MP
HDMI/VGA output	1-ch, resolution: 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60Hz
Frame Rate	Main Stream: 60 fps(N)/50 fps(P)
	Sub-stream: 60 fps(N)/50 fps(P)
Audio output	1-ch, RCA (Linear, 1 kΩ)
Decoding	
Playback resolution	6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF /DCIF/2 CIF / CIF/ QCIF
Capability	4-ch
Hard disk	
SATA	1 SATA
Capacity	Up to 6TB capacity for each HDD
External interface	
Network interface	1 RJ-45 10M / 100M/1000M self-adaptive Ethernet interface
USB port	1 × USB2.0,1 × USB3.0
POE Interface	
Interface	4 independent 100 Mbps PoE
Power	≤ 50W
Supported standard	AF/AT
General	
Power Supply	48 V DC
Consumption	≤ 10 W
Working temperature	14° F~131° F(-10° C ~+55° C)
Working humidity	10%~90%
Chassis	1U chassis
Dimensions (WxDxH)	12.4" × 9.0" × 1.8" (315 x 230 x 45mm)
Weight	≤ 4.4lb(2 kg)