

# LaView 16 Channel H.264 IP Network Video Recorder




## Key Features

- Third-Party network cameras supported
- Up to 6MP resolution recording
- HDMI and VGA output at up to 1920 x 1080P resolution
- Plug & Play with 16 independent PoE network interfaces
- 2 SATA HDD interface up to 12TB
- HDD quota and group management

## Rear Panel

1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE function

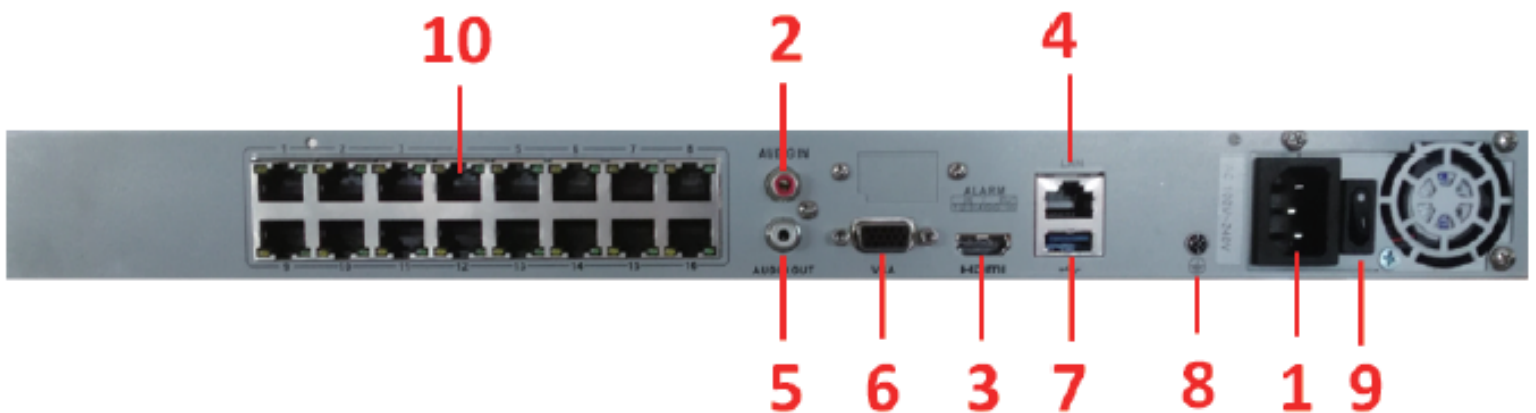

## LaView 16 Channel H.264 IP Network Video Recorder

NVR	LV-N9816C16E
<b>Video/Audio Input</b>	
IP video input	16-ch
Two-way audio input	1-ch, RCA(2.0Vp-p,1kΩ)
Incoming bandwidth	160Mbps
Outgoing bandwidth	80Mbps
Remote connections	128
<b>Video/Audio output</b>	
Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
HDMI/VGA output	1-ch, resolution: 1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60Hz
Frame Rate	Main Stream: 60 fps(N)/50 fps(P)
	Sub-stream: 60 fps(N)/50 fps(P)
Audio output	1-ch, RCA (Linear, 1 kΩ)
<b>Decoding</b>	
Playback resolution	6MP/5MP/4MP/3MP/1080P/UXGA / 720P / VGA / 4CIF / DCIF / 2 CIF / CIF / QCIF
Capability	16-ch@4CIF, 12-ch@720P, 6-ch@1080P
<b>Hard disk</b>	
SATA	2 SATA interface for 2 HDDs
Capacity	Up to 6TB capacity for each HDD
<b>External interface</b>	
Network interface	1 RJ-45 10M / 100M/1000M self-adaptive Ethernet interface
USB port	1 × USB2.0, 1 × USB3.0
<b>POE Interface</b>	
Interface	16 independent 100 Mbps PoE
Power	≤ 200W
Supported standard	AF/AT
<b>General</b>	
Power Supply	100 ~ 240 VAC
Consumption	≤ 15 W
Working temperature	14° F~131° F(-10° C~+55° C)
Working humidity	10%~90%
Chassis	19-inch rack-mounted 1U chassis
Dimensions (WxDxH)	17.5" x 11.4" x 1.8" (445 x 290 x 45mm)
Weight	≤ 8.8lb(4kg)