

2.1MP Mini Network Dome Camera



Key Features

- 2.1 megapixel high resolution
- IR cut filter with auto switch
- IR range: up to 100ft(30m)
- IP67 Weatherproof rated camera

Vandal proof

2MP




IK10




IP67



Night Vision

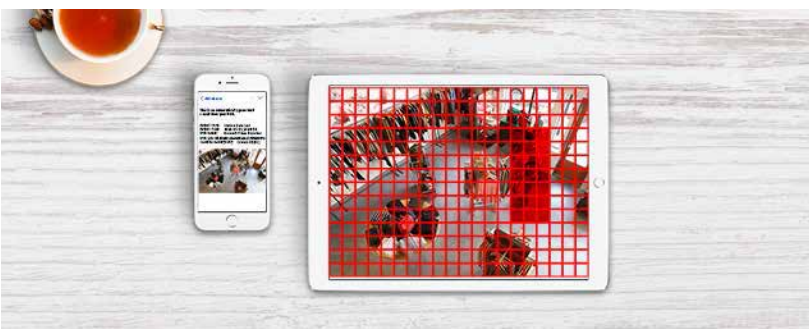


Motion Detection - Email Notification

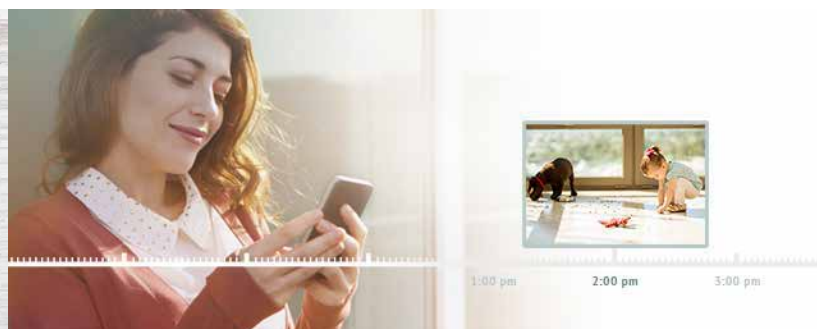

Remote View

Dimensions

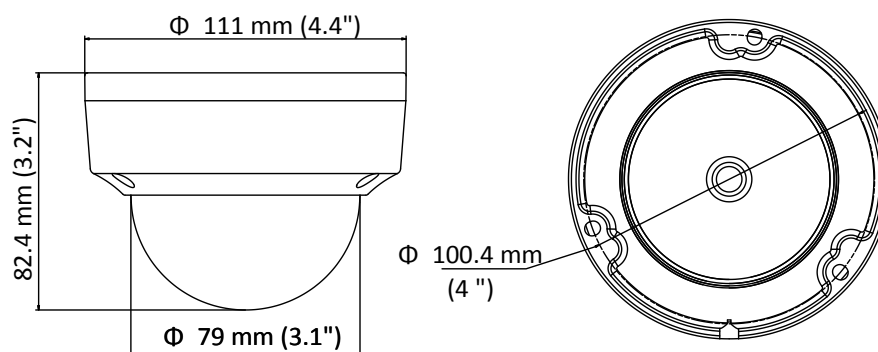

2.1MP Mini Network Dome Camera

Camera	
Image sensor	1/2.8" sensor
Min. illumination	0.0036Lux @(F2.0,AGC ON) 0 lux with IR
Shutter time	1/3 s to 1/100,000 s, support slow shutter
Lens	2.8mm, Angle of view: 105°
Lens mount	M12
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Wide Dynamic Range	Digital WDR
Swivel and Tilt	Swivel: 0° ~ 355° , Tilt: 0° ~ 70°
Compression Standard	
Video compression	Main stream: H.264 Zip+/H.264; Sub stream: H.264/MJPEG
H.264 Type	Baseline Profile/Main Profile
Dual Stream	Yes
Bit rate	32 Kbps ~ 8Mbps
Image	
Max. Image Resolution	1920 x 1080
Main Stream Max. Frame Rate	60Hz: 30fps(1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps(1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Saturation, Brightness, Contrast, Sharpness adjustable by client software or web browser
BLC	Support, zone configurable
ROI	Support
Network	
Network storage	Support local storage and NAS (NFS,SMB/CIFS), ANR
Alarm trigger	Motion detection,Video tampering, network disconnected, IP address conflicted
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, anti-flicker, mirror, password protection, privacy mask, watermark, IP address filter
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
Reset	Yes

2.1MP Mini Network Dome Camera

General	
Operating conditions	-22 ° F ~ 140 ° F (-30 ° C ~ 60 ° C) humidity 95% or less (non-condensing)
Power supply	12 VDC \pm 25% , PoE (802.3af)
Power consumption	Max. 5W
Weather proof rating	IP67
Impact Protection	IK10
IR range	Approx. 100ft (30 meters)
Dimension	Φ 4.4" x3.2" (Φ 111.0 \times 82.4 mm)
Weight	1.1 lbs (500g)