

2.1MP Mini Wifi Network Bullet Camera



Key Features

- 2.1 megapixel high resolution
- IR cut filter with auto switch
- IR range: up to 100ft(30m)
- IP67 Weatherproof rated camera
- Support Wi-Fi

2MP




WiFi



IP67



Night Vision

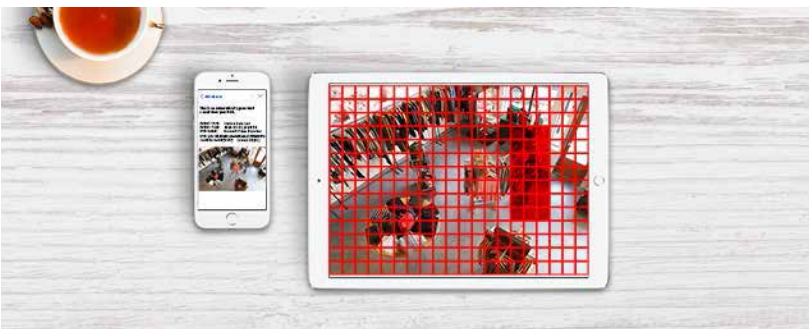


Motion Detection - Email Notification



Remote View

Dimensions

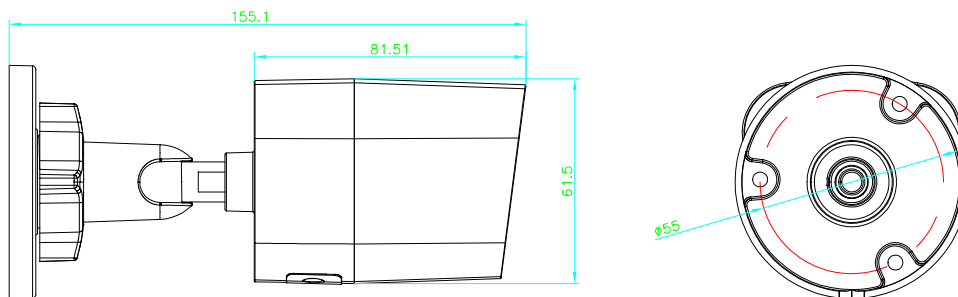

2.1MP Mini Wifi Network Bullet Camera

Camera	
Image sensor	1/2.8" sensor
Min. illumination	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR 0.028Lux @ (F2.0, AGC ON), 0 Lux with IR
Shutter time	1/3 s to 1/100,000 s
Lens	4mm@ F2.0, Angle of view: 85°
Lens mount	M12
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
Wide Dynamic Range	Digital WDR
Compression Standard	
Video compression	H.264/ MJPEG
Dual Stream	Yes
Bit rate	32 Kbps ~ 8Mbps
Image	
Max. Image Resolution	1920 × 1080
Frame rate	60Hz: 30fps(1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) 50Hz: 25fps(1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720)
Image settings	Rotate mode, Saturate, Brightness, Contrast adjustable by client software or web browser
BLC	Support, zone configurable
ROI	Support
Network	
Network storage	NAS (Support NFS,SMB/CIFS)
Alarm trigger	Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
General	One-key reset, Flash-prevention, dual stream, heartbeat, mirror, password protection, privacy mask, watermark, IP address filtering, Anonymous access
Standard	ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI
Interface	
Communication interface	1 RJ45 10 M / 100 M Ethernet interface
On-board storage	Built-in Micro SD/SDHC/SDXC card slot, up to 128 GB
Reset	Yes

2.1MP Mini Wifi Network Bullet Camera

Wi-Fi	
Wireless Standards	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	20/40MHz Support
Protocols	802.11b: CCK, QPSK, BPSK
	802.11g/n: OFDM
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transfer Rates	11b: 11Mbps
	11g: 54Mbps
	11n: up to 150Mbps
Wireless Rangey	50m(depend on environment)
General	
Operating conditions	-22° F ~ 140° F(-30° C ~ 60° C) humidity 95% or less (non-condensing)
Power supply	12 VDC ± 10% , PoE (802.3af)
Power consumption	Max. 5.8W
Material	Front Cover: Plas c; Back Cover&Bracket: Metal
Weather proof rating	IP67
IR range	Approx. 100ft (30 meters)
Dimension	φ 2.8" × 6.1" (φ 70.0 × 155 mm)
Weight	1.1 lbs (500g)