

## LaView 16 Channel Embedded HD-TVI DVR




### Key Features

- H.264 & Dual-stream video compression
- Support HD-TVI/analog/IP camera triple hybrid
- HDMI and VGA output at up to 1920 x 1080P resolution
- Support up to 16-ch synchronous playback
- Full channel 1080P@15fps,720P@30fps recording
- Long transmission distance over coax cable

### Rear Panel

1. Video In
2. Video Out
3. HDMI Interface
4. Audio Out
5. Audio In
6. VGA Interface
7. USB Port
8. LAN Network Interface
9. RS-485 Serial Interface
10. Power Switch
11. 12VDC Power Input

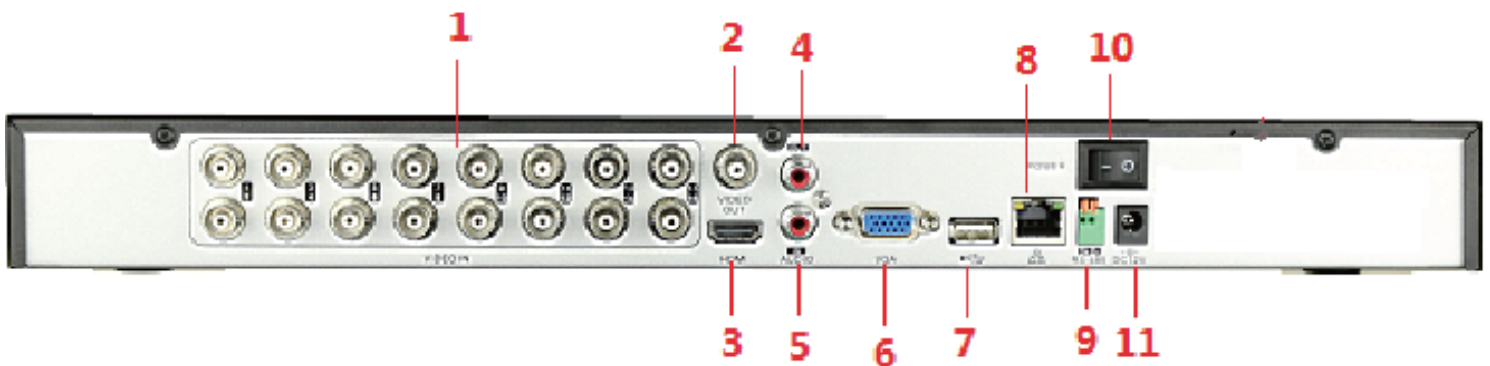

## LaView 16 Channel Embedded HD-TVI DVR

DVR	LV-T8216YHS
<b>Video/Audio Input</b>	
Video compression	H.264
HD-TVI video input	16 ch
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive
IP input	2ch(1080p@30fps)
Audio compression	G.711u
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)
<b>Video/Audio output</b>	
HDMI/VGA output	1920 × 1080 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Encoding resolution	Main stream: 1080P(non-real-time) / 720P / WD1 / 4CIF Sub-stream: WD1(non-real-time) / 4CIF(non-real-time) / CIF / QCIF
Frame Rate	Main stream: 1fps ~ Real time frame rate Sub-stream: 1fps ~ Real time frame rate
Video bit rate	32 Kbps- 8Mbps
Audio output	1-ch, RCA (Linear, 1 kΩ)
Audio bit rate	64 Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Playback resolution	1080P / 720P / WD1 / 4CIF / CIF / QCIF
Synchronous playback	16-ch
<b>Network</b>	
Remote connections	10
Network protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
<b>Hard disk</b>	
SATA	2 SATA
Capacity	Up to 4TB capacity for each HDD
<b>External interface</b>	
Network interface	1:10M / 100M/1000M self-adaptive Ethernet interface
Serial interface	1; standard RS-485 serial interface, half-duplex
USB port	2 × USB2.0
<b>General</b>	
Power Supply	12 V DC
Consumption	≤ 15W
Working temperature	32° F~131° F(0° C ~+55° C)
Working humidity	10%~90%
Chassis	1U chassis
Dimensions (WxDxH)	17.3" x 11.8" x 1.8" (440 x 300 x 45mm)
Weight	≤ 4.4lb(2.0kg)