LV-N9916C6E

LaView 16 Channel H.264 IP Network Video Recorder

NVR Key Features

- Third-party network cameras supported
- Up to 6MP resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Plug & Play with 16 independent PoE network interfaces
- 4 SATA HDD interface up to 6TB each
- HDD quota and group managment

Rear panel of LV-N9916C6E

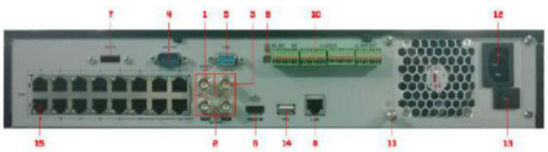

1. Video out
2. Aud io out
3. HDMI Interface
4. RS-232 interface
5. VGA
6. HDMI
7. eSATA
8. LAN Interface
9. Termination Switch
10. RS-485, Alarm in/out
11. GROUND
12. AC 100V~240V
13. POWER Switch
14. USB interface
15. Network Interfaces with POE function

Contents	Qty.
NVR(LV-N9916C6E)	1
Quick Start Guide	1
User Manual	1
HDMI Cable	1
6ft Enthernet cable	1
Remote Control	1
USB 2.0 Mouse	1
Security Sticker	4
Pre-installed HDD	3TB
NVR	**LV-N9916C6E**
Video/Audio input	
IP video input	16-ch
Two-way audio input	1ch
Incoming bandwidth	100Mbps
Video/Audio output	
Recording resolution	6MP / 5MP / 4MP / 3MP / 1080P / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC)
HDMI output	1-ch, resolution: 1920 × 1080P /60Hz, 1920 × 1080P / 50Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
VGA output	1-ch, resolution:1920 × 1080P /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
Audio output	2-ch, BNC (Linear, 600Ω)
Playback resolution	6MP / 5MP / 4MP / 3MP / 1080P / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Synchronous playback	16ch
Hard disk	
SATA	4 SATA interfaces for 2 HDDs + 1 DVD-R/W (default), or 4HDDs
eSATA	1 eSATA interface
Capacity	Up to 6TB capacity for each HDD
External interface	
Network interface	1 RJ-45 10 / 100 / 1000 Mbps self-adaptive Ethernet interface 16 independent 100 Mbps PoE network interfaces
Serial interface	1 RS-232 interface(for parameters configuration,maintenance,transparent channel) 1 RS-485 interface (reserved); 1 RS-485 keyboard interface (for special keyboard control)
USB interface	3 × USB 2.0
Alarm in	16
Alarm out	4
General	
Power supply	100 ~ 240VAC, 6.3A, 50 ~ 60Hz
Consumption	≤ 40 W
Working temperature	14°F~131°F(-10 °C ~ +55 °C)
Working humidity	10%~90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions(W × D × H)	17.3" x 15.3" x 2.8"(440.0 × 390.0 × 70.0 mm)
Weight	≤ 17.6 (8.0Kg) (without hard disk or DVD-R/W)